


스마트 금고 Simple Manual (GC-54W 일반형)

GUNN GARD®
(주)건가드 금고제작
www.gunngard.co.kr

1. How to register safe

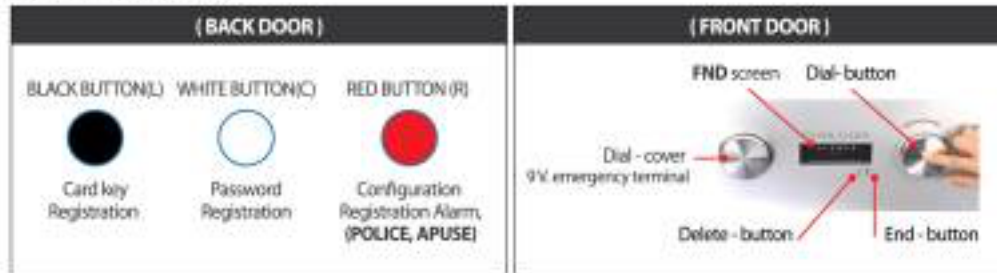

2. Registration of a card key

- Press the Black button on the back side of the door, "CARD" will appear and disappear on FND - screen, access a CARD on FND screen.
- When you hear the melody, press the black button again to finish registration (5 cards can be registered).

Notice : If press the black button twice in 1~2 seconds intervals, then "DELETE" will appear as soon as all registered card key data will be cleared.

3. Registration of a password

- Press the White button on the back side of the door, "DIAL" and "CURSOR" will appear on FND screen.
- Password should have 4 ~ 6 DIGIT - select the number by turn DIAL, and press DIAL BUTTON to select the numbers.
- When finish cursor, " " appears, press END-BUTTON on the front panel.
- When you hear the melody and "1 USER" appears, press the white - button again to finish registration. Each User can be registered 5 passwords.

Notice : If press the white button twice in 1~2 seconds intervals, "DELETE" will appear as soon as all registered password data will be cleared.

4. Set the alarm

- Press the red button on the back side of the door, "SIREN" appears, press the dial button.
- Turn the dial to choose "ON", press the red button again to finish registration.

5. Registration of dual a card key and a password

- Press the red button on the back of the door (right side) for 6 seconds and release the button after "BEEP" sound, it will appear "OR AND" on the FND screen.
- Turn the dial to the right, "OR AND" appears. After selecting "AND", press the dial, the setting is completed.

Caution : After registered dual type, when loss one of card or password, you cannot use the safe. If you do not require high security, each single registration is more convenient to use.

6. Battery replacement time and method

When appear "BATT 9" or "BATT 5" on the screen, or an inability to open in spite of "OPEN" on FND screen, each voltage battery must be replaced with new batteries (Alkaline 1.5v AA size, 4pcs or 9V). When replacing the batteries, make sure that the poles (+, -) are correctly positioned. Do not use new batteries with old batteries.

Caution : In case of problems arising due to leakage of battery fluid, it is excluded from warranty.